




知从青龙 SECUREBOOT 恩智浦 S32K1XX 产品手册
ZC.QINGLONG SECUREBOOT PRODUCT MANUAL

BASED ON NXP S32K1XX

知从青龙 BootLoader
ZC.QINGLONG BootLoader

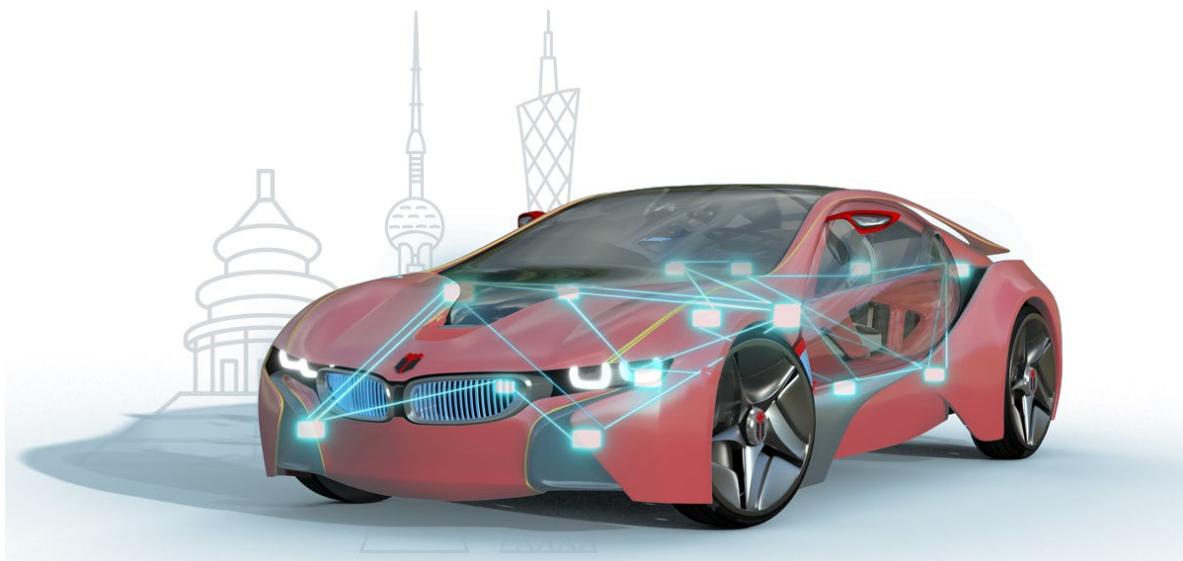

知从青龙 SECUREBOOT 恩智浦 S32K1XX 产品手册

ZC.QINGLONG SECUREBOOT PRODUCT MANUAL

BASED ON NXP S32K1XX

知从青龙 BootLoader

ZC.QINGLONG BootLoader

1 功能概述 FUNCTIONAL OVERVIEW

知从青龙 BootLoader 是由知从科技自主研发的程序刷新软件(BootLoader)。使用知从青龙 BootLoader 的控制器，可以通过 CAN、LIN、SPI、UART 等通信方式实现应用程序的更新功能。目前，知从青龙 BootLoader 已支持 NXP、Infineon、Renesas、ST 等多家芯片，并且支持多家整车厂程序刷新规范，可提供定制开发服务。

ZC.Qinglong BootLoader is a self-developed program refreshing software (BootLoader) by ZCTechnology. Controllers using ZCQinglong BootLoader can achieve the update function of application programs through communication methods such as CAN, LIN, SPI, and UART. Currently, ZCQinglong BootLoader supports chips from NXP, Infineon, Renesas, ST, and other manufacturers, and also supports the program refreshing standards of various car manufacturers, offering customized development services.

知从青龙 SecureBoot 是基于 NXP S32K1xx 平台，实现 BootLoader 的 Security 功能。通过实现 SecureBoot，控制器可以识别 BootLoader 程序和应用程序是否被篡改，特别是在 FOTA 过程中，可以保证程序刷新的安全性。

ZC.Qinglong SecureBoot, based on the NXP S32K1xx platform, implements the security features of the BootLoader. By implementing SecureBoot, the controller can detect if the BootLoader program and application programs have been tampered with, ensuring the security of program updates especially during the FOTA process

2 应用领域 APPLICATION FIELDS

知从青龙 SecureBoot 可应用于使用 S32K1xx 系列芯片的控制器程序刷新功能。支持的控制器包括：

ZC.Qinglong SecureBoot can be applied to the controller program refreshing functions that use the S32K1xx series chips. The supported controllers include:

- 车身控制器
Body Controller
- 网关控制器
Gateway Controller
- 车载娱乐系统控制器
In-Vehicle Infotainment System Controller
- 电子驻车制动系统
Electronic Parking Brake System
- 胎压监测系统
Tire Pressure Monitoring System
- 电池管理系统
Battery Management System
- 空调控制系统
Air Conditioning Control System
- 车窗控制系统
Window Control System
- 门控系统
Door Control System

3 配置环境 CONFIGURATION ENVIRONMENT

配置环境 Configuration Environment	
Hardware (Chip)	S32K144 S32K146 S32K148
Compilers Supported	GreenHills v2018.5.4 S32DS_ARM_v2018_R1
Debugger	Lauterbach (Trace32 R.2018.02) Icosystem (IC5700)

GreenHills 编译器 GreenHills Compiler	
编译选项 Compilation options	-cpu=cortexm4 -noobj --long_long -G -dual_debug -farcalls -dwarf2 -no_misalign_pack -nostartfiles -pragma_asm_inline -THUMB
链接选项 Linking options	-cpu=cortexm4 -pragma_asm_inline -g -keepmap -dual_debug -hex -nostartfiles

S32DS 编译器 S32DS Compiler	
编译选项 Compilation Options	-DCPU_S32K144HFT0VLLT -O0 -g3 -Wall -c -fmessage-length=0 -ffunction-sections -fdata-sections -mcpu=cortex-m4 -specs=ewl_c9x_noio.specs
链接选项 Linking Options	-T "S32K144flash.ld" -WI,-Map,"S32K144_Bootloader.map" -Xlinker --gc-sections -mcpu=cortex-m4 -specs=ewl_c9x_noio.specs

4 开发背景 DEVELOPMENT BACKGROUND

目前，汽车上的电子电气架构越来越复杂，并伴随着汽车的电动化、智能化、网联化、共享化，软件的研发在汽车上占比越来越大。软件更新的频率越来越高。而且，在汽车的整个生命周期中，包括研发阶段、生产阶段、售后阶段，各个阶段都需要实现软件的更新功能。因此，客户对软件程序更新的需求越来越迫切。

Currently, the electronic and electrical architecture of automobiles is becoming increasingly complex. With the electrification, intelligence, connectivity, and sharing of vehicles, the proportion of software R&D in automobiles is growing larger. The frequency of software updates is also increasing. Moreover, throughout the entire lifecycle of a car, including the R&D phase, production phase, and after-sales phase, software update functionality is required in each stage. Therefore, customer demand for software program updates is becoming more urgent.

并且，随着车联网的落地，信息安全越来越受重视，芯片作为信息的载体，因此，对芯片中的数据保护尤其重要。知从青龙 SecureBoot 是基于 NXP S32K1xx 平台，实现 BootLoader 的 Security 功能。通过实现 SecureBoot，控制器可以识别 BootLoader 程序和应用程序是否被篡改，特别是在 FOTA 过程中，可以保证程序刷新的安全性。

Furthermore, with the implementation of the Internet of Vehicles, information security is gaining more attention. As chips serve as carriers of information, data protection within the chips is particularly important. ZC.Qinglong SecureBoot, based on the NXP S32K1xx platform, implements the security features of the BootLoader. By implementing SecureBoot, the controller can detect if the BootLoader program and application programs have been tampered with, ensuring the security of program updates, especially during the FOTA process.

5 功能描述 FUNCTIONAL DESCRIPTION

5.1 产品特点 Product Features

- 适用于多达十几家整车厂的程序更新规范

Suitable for the program update specifications of up to a dozen car manufacturers

- 支持应用程序和数据的更新功能

Supports update functions for applications and data

- 支持 BootLoader 自更新功能

Supports self-update functionality for BootLoader

- 支持 HIS 规范


Supports HIS specifications

- 支持 CAN/LIN/SPI/UART 等通信

Supports communication via CAN/LIN/SPI/UART, etc.


- 适配知从玄武程序更新工具，提供完整的程序更新解决方案

Adapts to ZC.Xuanwu program update tools, offering a complete solution for program updates

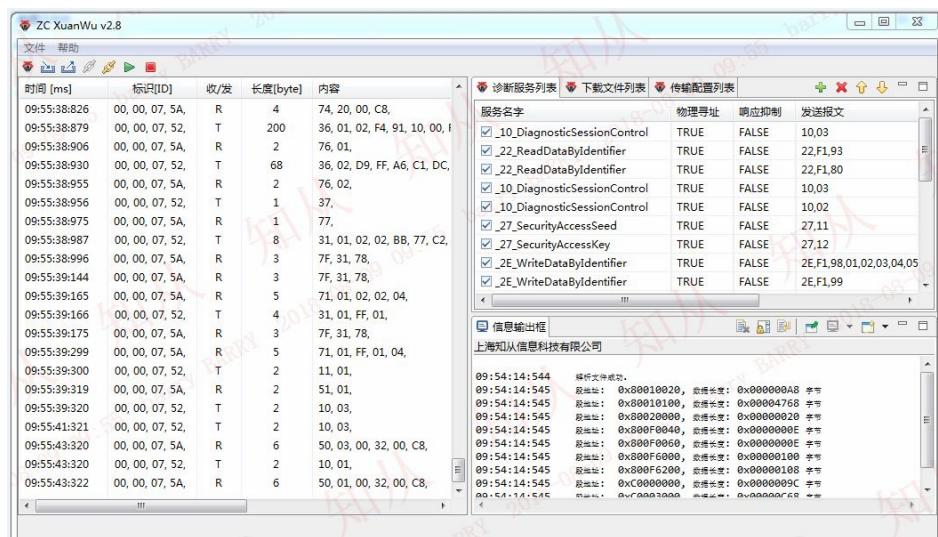

知从玄武—程序更新工具
ZC.XUNWU—Program Update Tool

5.2 软件架构 Software Architecture

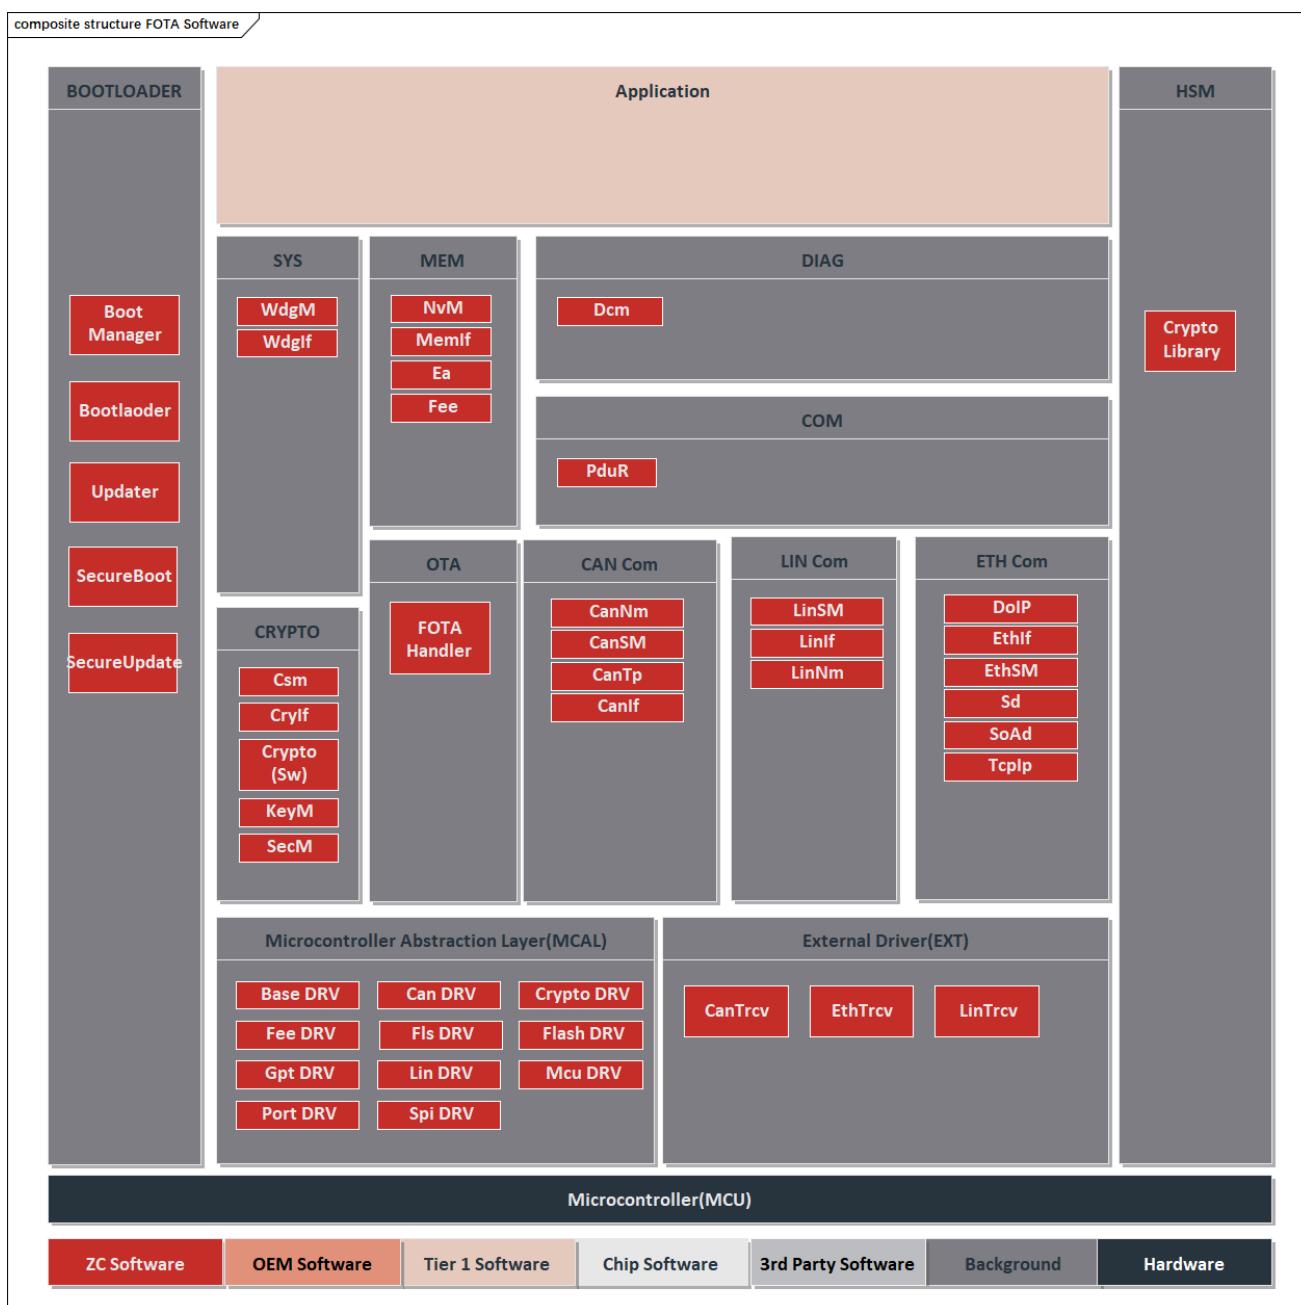

FOTA 系统架构
FOTA SYSTEM ARCHITECTURE

知从青龙 FOTA 系统架构支持 CAN、LIN、SPI、Ethernet 通信场景下的 FOTA 功能，通过 Dcm 模块实现 UDS 报文解析和诊断刷写，并通过适配 Crypto Library 实现各 OEM 规范的信息安全需求。以下为各模块的功能描述：

➤ Bootloader

BootManager 模块提供 FOTA 启动管理功能，支持适配软硬件 SecureBoot 功能，通过烧录和刷写存储 Bootloader 和 Application 的期望 MAC 值，启动阶段 SecureBoot 通过计算比较 Bootloader 和 Application 的 MAC 执行软件完整性校验，保证软件安全需求。

- Can Com
Can 模块支持 CAN、CANFD 通信功能。
- Spi Com
Spi 模块支持主从刷写功能，通过适配 5、6、7 线硬件配置，可支持多种 SPI 通信刷写模式。
- Ethernet Com
DoIP 模块基于 TCP/IP 协议实现 Ethernet 通信收发功能，满足 ISO 13400 标准定义。通过车辆识别、路由激活、诊断消息功能实现 UDS 刷写流程，实现 Ethernet OTA 功能。
- Dcm
Dcm 模块基于通信模块支持实现诊断功能，满足 ISO 14229 以及 ISO 15765 标准定义。
- Crypto、HSM
Ethernet OTA 支持适配木牛加密库功能，支持非对称加密算法和加密算法结合实现安全刷写功能，适配证书认证功能满足安全诊断功能，适配 HSM 提高信息安全功能的稳定性和校验速度。

The Qinglong Ethernet FOTA system architecture supports the FOTA function in communication scenarios such as CAN, LIN, SPI, and Ethernet. It realizes the parsing of UDS messages and diagnostic programming through the Dcm module, and meets the information security requirements of various OEM specifications by adapting to the Crypto Library. The following are the functional descriptions of each module:

- Bootloader
The BootManager module provides FOTA startup management functions and supports the adaptation of hardware and software SecureBoot functions. It stores the expected MAC values of the Bootloader and Application through programming and flashing. During the startup phase, SecureBoot performs software integrity verification by calculating and comparing the MACs of the Bootloader and Application to ensure software security requirements.
- Can Com
The Can module supports CAN and CANFD communication functions.
- Spi Com
The Spi module supports the master-slave programming function. By adapting to the hardware configurations of 5, 6, and 7 wires, it can support multiple SPI communication programming modes.

➤ Ethernet Com

The DoIP module realizes the Ethernet communication sending and receiving functions based on the TCP/IP protocol, meeting the definition of the ISO 13400 standard. It implements the UDS flashing process through vehicle identification, routing activation, and diagnostic message functions, thereby achieving the Ethernet OTA function.

➤ Dcm

The Dcm module realizes the diagnostic function based on the support of the communication module, meeting the definitions of ISO 14229 and ISO 15765 standards.

➤ Crypto, HSM

The Ethernet OTA supports the adaptation of the Muniu Crypto Library functions. It combines asymmetric encryption algorithms with other encryption algorithms to achieve the secure flashing function. It adapts to the certificate authentication function to meet the security diagnostic requirements and adapts to the HSM to improve the stability and verification speed of the Cybersecurity function.

5.3 内存结构 Memory Structure




ECU 的内存分为 PFLASH 和 RAM，PFLASH 区分为 Application&Data 和 BootLoader 区，RAM 区分为 FLASH Driver 和 Data 区。

The ECU's memory is divided into PFLASH and RAM. PFLASH is further divided into Application & Data and BootLoader areas, while RAM is divided into FLASH Driver and Data areas.

5.4 通信协议支持 Communication Protocol Support

知从青龙 SecureBoot 支持 CAN/LIN/SPI/UART 等通信协议，满足不同的客户需求。

ZC.Qinglong SecureBoot supports communication protocols such as CAN/LIN/SPI/UART, meeting the diverse needs of customers.

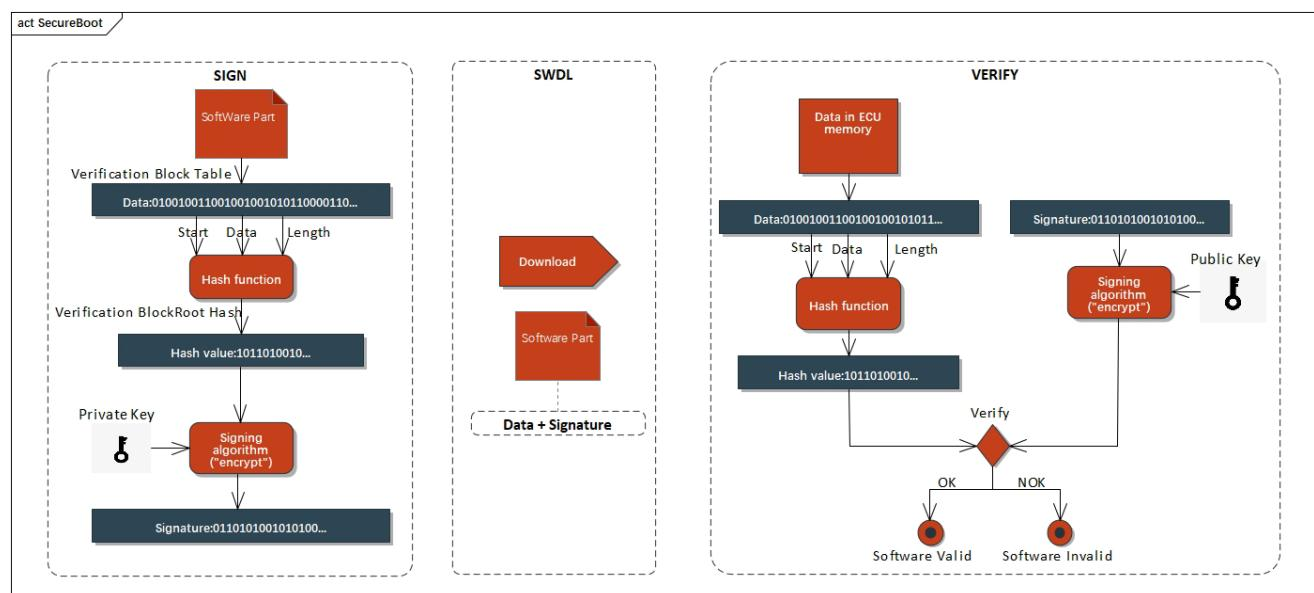

6 过程文档 PROCESS DOCUMENTATION


开发流程 Development Process	文档描述 Document Description
需求收集 Requirement Collection	顾客的需求文档 Customer Requirement Document
软件需求分析 Software Requirement Analysis	需求分析 Requirement Analysis 需求分析规格书 Requirement Analysis Specification 软件需求追踪表 Software Requirement Traceability Matrix 客户的问题沟通表 Customer Issue Communication Form
软件架构设计 Software Architecture Design	软件架构说明书 Software Architecture Manual 软件架构的追踪表 Software Architecture Traceability Table
软件详细设计和单元设计 Software Detailed Design and Unit Design	BootLoader 详细设计说明书 BootLoader Detailed Design Manual 配置工具设计 Configuration Tool Design 软件详细设计追踪表 Software Detailed Design Traceability Table BootLoader 详细设计评审 BootLoader Detailed Design Review
软件单元测试 Software Unit Testing	QAC 分析报告 QAC Analysis Report Tessy 测试报告

开发流程 Development Process	文档描述 Document Description
	Tessy Test Report
	软件单元验证策略 Software Unit Verification Strategy
软件集成和集成测试 Software Integration and Integration Testing	集成策略 Integration Strategy 集成手册 Integration Manual 集成测试策略 Integration Test Strategy 集成测试报告 Integration Test Report 资源分析报告 Resource Analysis Report
软件系统测试 Software System Testing	BootLoader 软件测试报告 BootLoader BootLoader Software Test Report BootLoader 软件测试报告评审 BootLoader BootLoader Software Test Report Review
发布	发布文档 Release Documentation

7 功能安全 FUNCTIONAL SAFETY

1. 功能安全评估报告 Functional Safety Assessment Report

2. 功能安全证书 Functional Safety Certificate

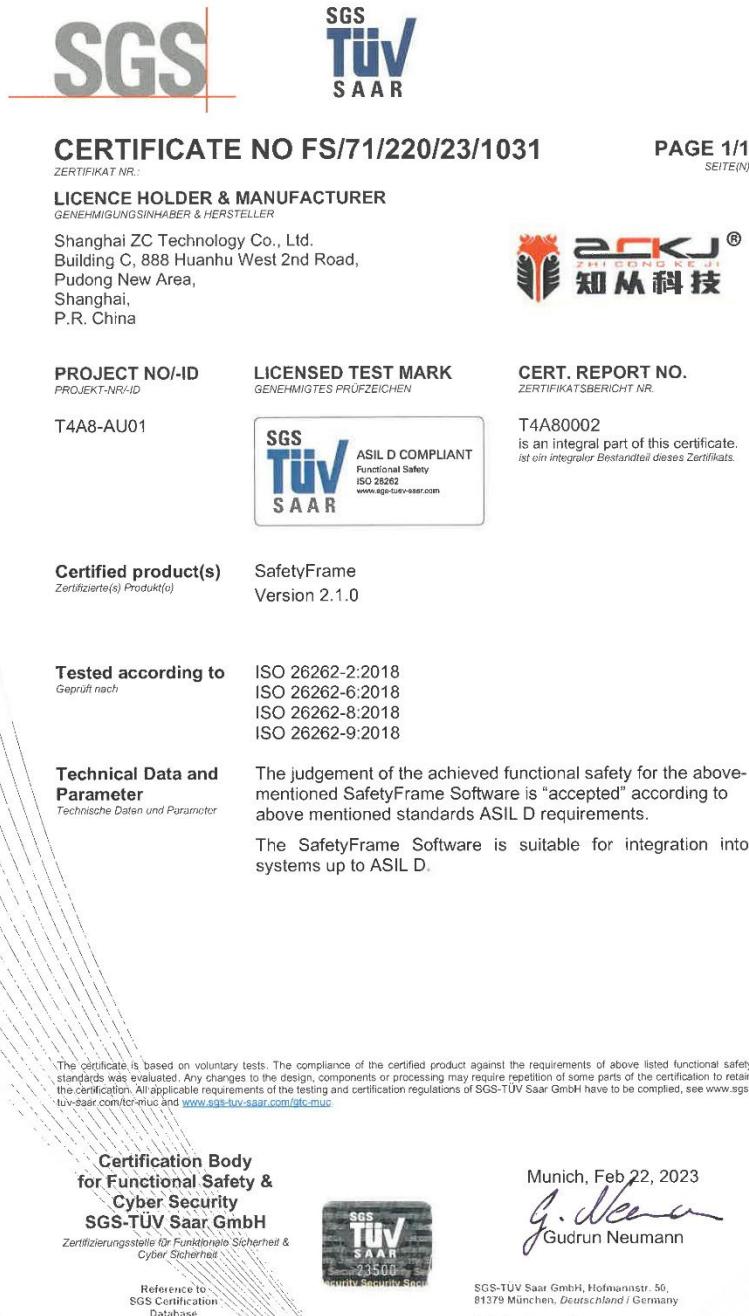

8 证书 CERTIFICATE



青龙软件著作权登记证书
QINGLONG SOFTWARE COPYRIGHT REGISTRATION CERTIFICATE



青龙软件产品登记证书
QINGLONG SOFTWARE PRODUCT REGISTRATION CERTIFICATE



公众号



业务联系

成为全球领先的汽车基础软件公司
To Be the Global Leading Automotive Basic Software Company

